

File No.: PUXING-UPCG-001

Date of Issue: 2008-2-15

## Guide to USB Programming Cable Usage


### Compatible Radios

This Guide is intended for programming of HYT radio models specified in the table below.

Radio Model	USB Programming Cable
PX-333, PX-888, PX-777(PLUS), PX-328 PX-628, PX-555, PX-666, PX-728, PX-58/28, PX-398S	PX-PCU7


### Procedures

1. Install the USB driver SETUP.exe
2. Install the programming software of PUXING radio.
3. Startup the programming software.
4. Connect the USB programming cable.
5. Select a communication port.

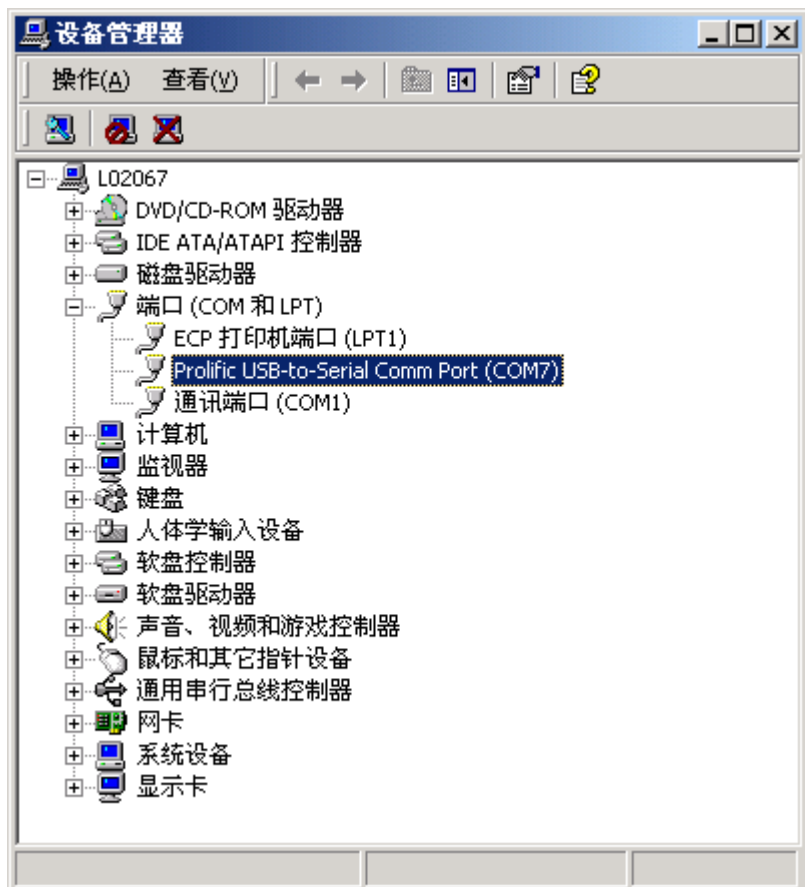

The communication port varies according to the USB port. To make sure and correctly select the communication port for USB programming cable, view the detailed information of port from the computer hardware Device Manager after connecting a USB device to a computer. Take WINDOWS 2000 for example, right-click My Computer -> Properties -> Hardware -> Device Manager, to view the detailed information. As shown in the above figure, COM7 is the communication port for USB programming cable.

Then select a communication port from the programming software. Operation for PX-888 radio is illustrated in the following figure:

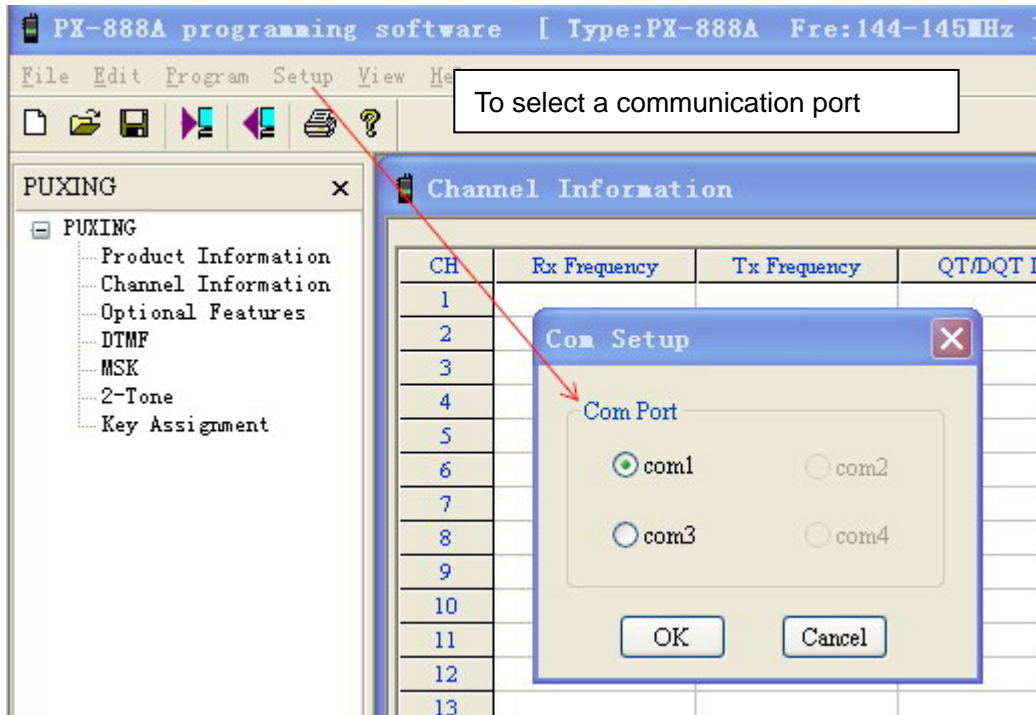

6. Begin writing and reading operations.

### Precautions

Always obey the following guidelines when using a USB programming cable:

1. The USB driver must be installed.
2. After connecting USB programming cable to a computer, a communication port must be selected correctly.